


Office of Naval Research
Contract Nonr-1866 (16) NR - 372-012
National Aeronautics Space Administration
Grant NGR 22-007-068

SEQUENTIAL CODING SCHEMES FOR AN ADDITIVE NOISE CHANNEL WITH A NOISY FEEDBACK LINK



by

R. L. Kashyap

May 1966 - August 1966

Technical Report No. 508

"Reproduction in whole or in part is permitted by the U. S.
Government. Distribution of this document is unlimited."

Division of Engineering and Applied Physics
Harvard University • Cambridge, Massachusetts

N 67-19938
ACCESSION NUMBER
1037RS2
(PAGES)
CR-82935
(NASA CR OR TMX OR AD NUMBER)
(THRU)
(CODE)
07
(CATEGORY)
FACILITY FORM 602

Office of Naval Research

Contract Nonr-1866(16)

NR -372 - 012

5 SEQUENTIAL CODING SCHEMES FOR AN ADDITIVE
NOISE CHANNEL WITH A NOISY FEEDBACK LINK 4

by

6 R. L. Kashyap 9

298 Technical Report No. 508 END

Reproduction in whole or in part is permitted by the U. S.
Government. Distribution of this document is unlimited.

4 Technical Report, 4 May, 1966, 9 August, 1966 6 [10 CV

The research reported in this document was supported by the U. S.
Army Research Office, the U. S. Air Force Office of Scientific
Research, and the U. S. Office of Naval Research under the Joint
Services Electronics Program by Contract Nonr-1866 (16), and by
NASA under Contract NGR-22-007-068. 25 35 125

26 2 Computation Laboratory 3

Division of Engineering and Applied Physics

1 Harvard University

Cambridge, Massachusetts 2

SEQUENTIAL CODING SCHEMES FOR AN ADDITIVE
NOISE CHANNEL WITH A NOISY FEEDBACK LINK*

R. L. Kashyap

Computation Laboratory
Harvard University
Cambridge, Massachusetts

ABSTRACT

A coding scheme for additive Gaussian channel is developed using a noisy feedback link and D -dimensional elementary signals with no band width constraint. This allows error free transmission at a rate $R < R_c$ where R_c is slightly less than the channel capacity C . When there is no noise in the Feedback channel, the coding scheme reduces to a D -dimensional generalization of the coding scheme of Schalkwijk and Kailath. In addition, the expression for the probability of error is determined when T , the time of Transmission rate is finite. Our scheme is also compared with the best codes which use only the forward channel.

* This work was supported in part by NASA under Contract NGR-22-007-068, the Joint Services Electronic Program under Contract Nonr-1866(16) and by the Division of Engineering and Applied Physics, Harvard University.

SEQUENTIAL CODING SCHEMES FOR AN ADDITIVE NOISE CHANNEL WITH A NOISY FEEDBACK LINK

I. INTRODUCTION

We are interested in the transmission of messages over a noisy channel using a noisy feedback channel which will be used to convey the state of the uncertainty of the receiver to the transmitter. This model is suitable for many of the communication problems. The only constraint on the transmitted signals is their limited average power. The starting point of our paper is the classical result due to Shannon [1] who showed the existence of a coding scheme in which the probability of error can be made arbitrarily small for a nonzero transmission rate. Specifically, suppose that one has to transmit one of M messages during a period of T seconds across a Gaussian channel with double sided spectral density $\frac{N_0}{2}$ with P_{av} being the average power constraint on the transmitted signals. Let $R \triangleq$ transmission rate $= ((\ln M)/T)$ nats/sec and $P_{e, opt}(M, T, \frac{P_{AV}}{N_0})$.

Probability of error using the optimal coding scheme with a signal-to-noise ratio P_{AV}/N_0 . Then

$$\lim_{T \rightarrow \infty} P_{e, opt}(M, T, \frac{P_{AV}}{N_0}) = \begin{cases} 0 & \text{if } R < C \\ 1 & \text{if } R > C \end{cases}$$

where $C =$ channel capacity $= P_{AV}/N_0$. A number of authors [2-6] have investigated the transmission of messages over noisy channels using a noiseless feedback link. Shannon [2] showed that the existence of a noiseless

feedback link will not result in an increase in the channel capacity in the forward direction. The recent striking contribution is due to Schalkwijk and Kailath [6] who developed a coding scheme using noiseless feedback link and one dimensional elementary signals which realizes a transmission rate equal to the channel capacity and demonstrated its superiority over best known conventional codes like the simplex codes [7]. However, if there is noise in the feedback link, their coding scheme implies zero transmission rate if we insist on zero probability of error.

The coding scheme of this paper is obtained by considering the problem of information transmission on one of recursive estimation problem both at the transmitter and the receiver. The main result is that messages using D-dimensional elementary signals can be transmitted over a noisy channel using a noisy feedback channel with zero probability of error at any rate less than the critical rate R_c which is only slightly less than channel capacity C of the forward channel

$$R_c \approx \left(\frac{1}{1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o}} \right) \frac{P_{AV}}{N_o}$$

where $\frac{N_b}{2}$ is the two-sided spectral density of the additive Gaussian noise in the feedback link, and other symbols have been defined earlier. In particular, when the noise in the feedback link is absent, the coding scheme becomes a generalization of the coding scheme in reference [6] for D-dimensional signals. In addition, if the time of transmission T is finite, expression will be derived for the probability of

error and this scheme will be compared with the best codes (simplex codes) which use only the forward channel.

II. CODING SCHEME

We will first convert the continuous time Gaussian channel into a discrete time Gaussian channel and describe the coding scheme in terms of the latter.

1. Transformation of a continuous time Gaussian channel into a discrete time channel.

Suppose one has to transmit one of the M messages belonging to the set

$$\{m^{(j)}\} \triangleq \{m^{(1)}, m^{(2)}, \dots, m^{(M)}\}$$

over a time T seconds. Let us assume a set of orthogonal elementary signals $\phi_1(t), \dots, \phi_D(t)$ are available which satisfy the relation

$$\int \phi_i(t-k\Delta) \phi_j(t-l\Delta) dt = \delta_{ij} \delta_{kl}, \quad \begin{matrix} i, j = 1, \dots, D \\ k, l = 1, \dots, N \end{matrix} \quad (1)$$

where Δ is the discretization interval. The actual signal transmitted is

$$s(t) = \sum_{i=1}^N u^T(i) \phi(t-i\Delta)$$

where

$$\phi^T(t) = (\phi_1(t), \phi_2(t), \dots, \phi_D(t))$$

$$u^T(i) = (u_1(i), \dots, u_D(i))$$

$N = \text{Largest integer less than or equal to } (T/\Delta)$. The vectors

$u(i), i = 1, \dots, N$ are yet unknown and depend on the particular message to be transmitted.

Let the received signal be $r_1(t)$ and the additive white Gaussian noise with spectral density $\frac{N_o}{2}$.

$$r_1(t) = s(t) + n_1(t) \quad (2)$$

$$\begin{cases} E [n_1(t)] = 0 \\ E [n_1(t_1) n_1^T(t_2)] = \frac{N_o}{2} \delta(t_1 - t_2) \end{cases} \quad (3)$$

The receiver computes a signal $s_2(t)$ on the basis of its measurements and sends it back to the transmitter. Let the noise in the feedback channel be $n_2(t)$ which is white Gaussian and additive with spectral density $\frac{N_b}{2}$.

$$s_2(t) = \sum_{i=1}^N v^T(i) \delta(t-i\Delta) \quad (4)$$

$$r_2(t) = s_2(t) + n_2(t) \quad (5)$$

$$\begin{cases} E [n_2(t)] = 0 \\ E [n_2(t_1) n_2(t_2)] = \frac{N_b}{2} \delta(t_1 - t_2) \end{cases} \quad (6)$$

If we define the following vectors of dimension D

$$y(i) \triangleq \int r_1(t) \delta(t-i\Delta) dt$$

$$\eta(i) \triangleq \int n_1(t) \delta(t-i\Delta) dt$$

$$z(i) \triangleq \int r_2(t) \delta(t-i\Delta) dt$$

$$\xi(i) \triangleq \int n_2(t) \delta(t-i\Delta) dt$$

then the continuous time model represented by Figure 1 and equations (2), (3), (5), (6) can be replaced by the discrete time model represented in Figure 2 and equations (7)-(9), with discretization interval Δ [7]

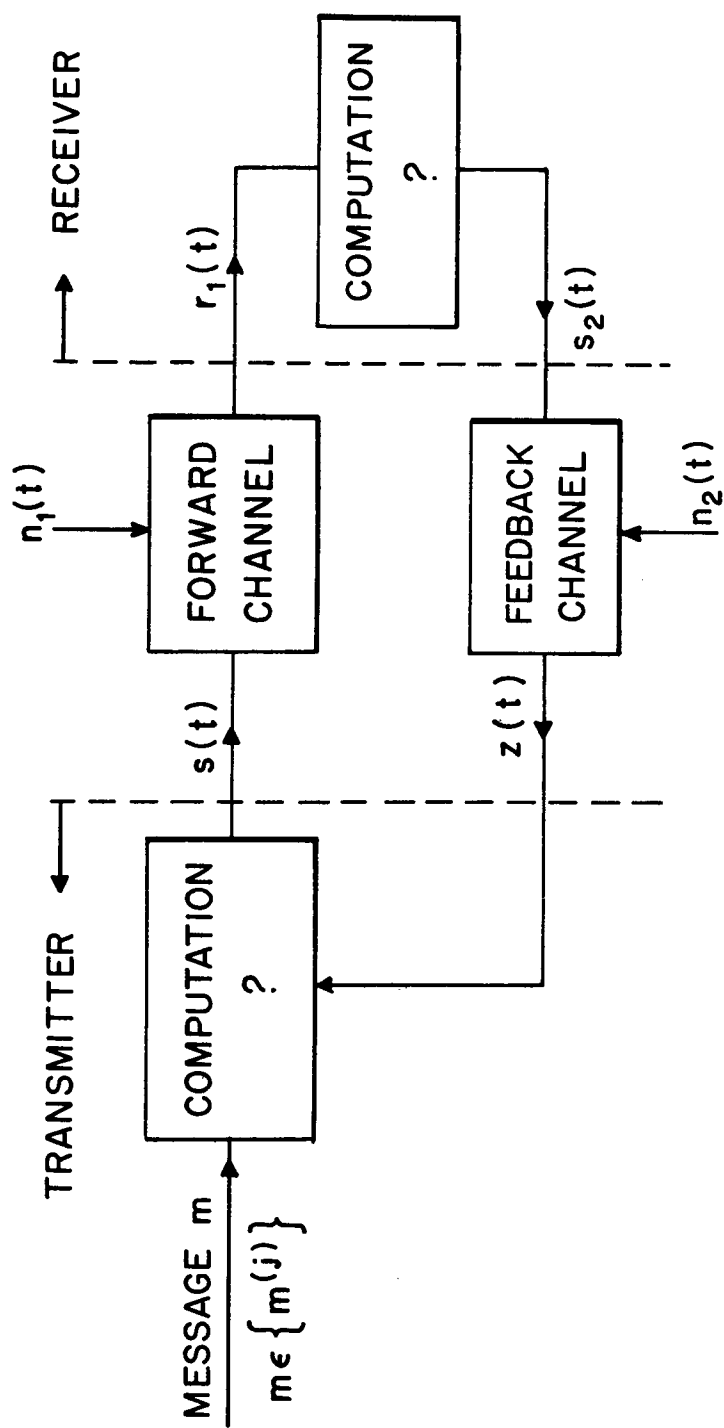


FIG. 1 CONTINUOUS TIME FEEDBACK COMMUNICATION MODEL

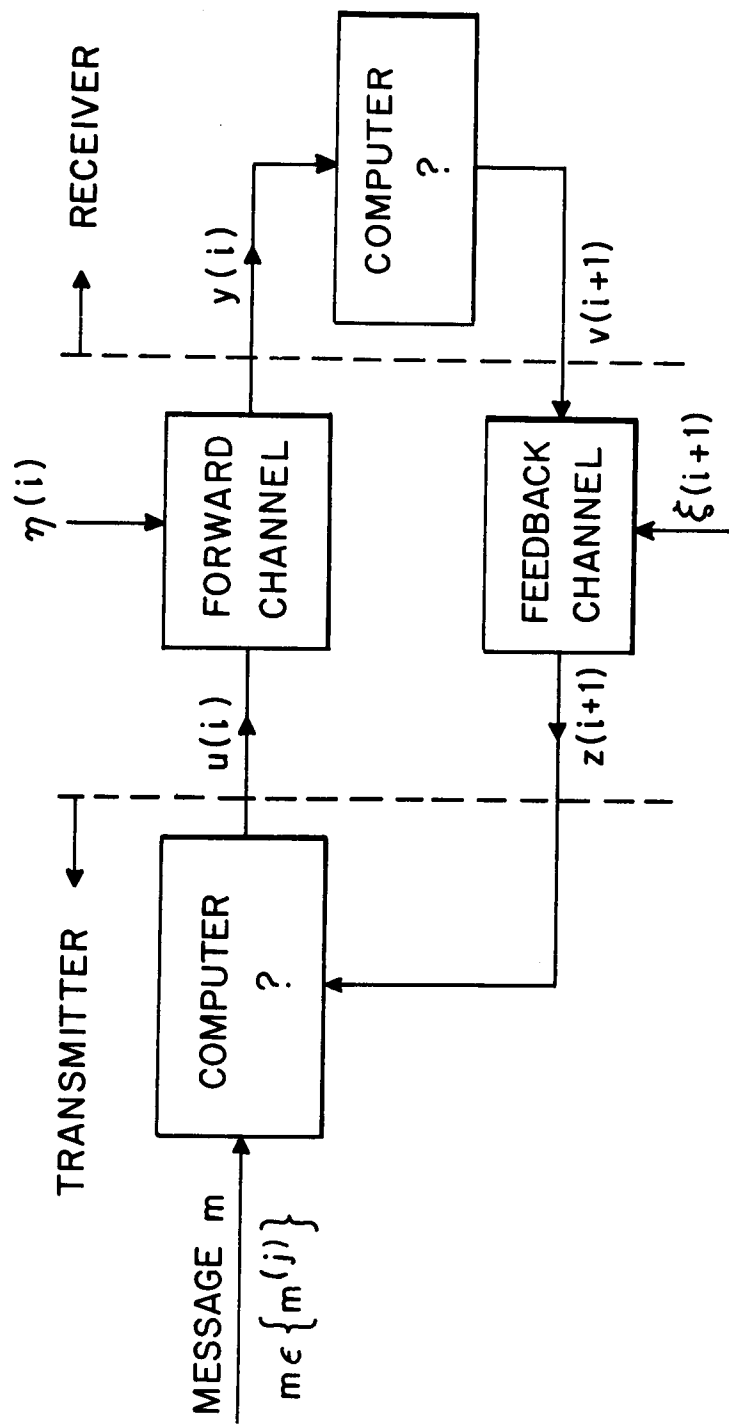


FIG.2 DISCRETE TIME FEEDBACK COMMUNICATION MODEL

$$y(i) = u(i) + \eta(i) \quad (7)$$

$$z(i) = v(i) + \xi(i) \quad (8)$$

$\eta(i)$, $\xi(i)$, $i=1, \dots, N$ are white Gaussian random vectors with

$$\begin{cases} E(\eta(i)) = E(\xi(i)) = 0 \\ E(\eta(i) \eta^T(j)) = \frac{N_0}{2} \delta_{ij} I \\ E(\xi(i) \xi^T(j)) = \frac{N_b}{2} \delta_{ij} I \\ E(\eta(i) \xi^T(j)) = 0 \end{cases} \quad (9)$$

Let $\sigma_\eta^2 \triangleq \frac{N_0}{2}$ and $\sigma_\xi^2 \triangleq \frac{N_b}{2}$

The problem is to determine the vectors $u(i)$, $i=1, \dots, N$ that are to be sent at the transmitter and the vectors $v(i)$, $i=1, \dots, N$ that are to be sent at the receiver so that error free transmission is possible at a nonzero transmission rate. Of course, the vectors $u(i)$, $v(i)$, $i=1, 2, \dots, N$, will depend on the particular message that has to be sent to the receiver.

2. Description of coding scheme CS-1

Let us assume that the number $M = M_1^D$ where M_1 is an integer. Let us represent the messages of set $\{m^{(j)}\}$ by M equispaced points in a D -dimensional hypercube centered about the origin. Figure 3 illustrates this for the case $M = 3^2$ and $D = 2$.

We will associate the j^{th} message $m^{(j)}$ with the D -dimensional vector $x^{(j)}$ joining the origin to the j^{th} point on the lattice. The coding scheme CS-1 can be described briefly as follows:

- (A) Let $x = x^{(j)}$ if the message $m^{(j)}$ is to be transmitted to the receiver.
set $i = 1$.

(B) At the i^{th} step, the transmitter sends the vector $u(i) \triangleq a(x - \bar{x}(i))$ where a is a scalar constant and $\bar{x}(i)$ will be described later.

(C) The receiver has a measurement $y(i)$ (D-vector)

$$y(i) = a(x - \bar{x}(i)) + \eta(i) \quad (10)$$

Using this measurement, the receiver recursively computes the vector $\hat{x}(i+1)$ to be described later. It sends back to the transmitter the vector $a \hat{x}(i+1)$.

(D) The transmitter receives a measurement $z(i+1)$ (D-vector)

$$z(i+1) = a \hat{x}(i+1) + \xi(i+1) \quad (11)$$

Using this measurement, the transmitter recursively computes $\bar{x}(i+1)$ and hence $a(x - \bar{x}(i+1))$

(E) Increment i by one and go back to step (B)

$\hat{x}(i+1)$ = Maximum likelihood estimates of the vector parameter x at the receiver on the i^{th} stage based on all the available measurements till that stage i.e., $y(1), y(2), \dots, y(i)$.

$\bar{x}(i+1)$ = Maximum likelihood estimate (Kalman estimator) of the random vector $\hat{x}(i+1)$ by the transmitter based on all the measurements $z(1), \dots, z(i+1)$ and the parameter x .

$$= E [\hat{x}(i+1) / z(1), \dots, z(i+1); x]$$

The recursive equations for $\hat{x}(i)$ and $\bar{x}(i)$ are given below and a block diagram of the coding scheme is in Figure 4. It should be noted that

$\zeta(i)$, $\theta(i)$, $p(i)$, $q(i)$, and $r(i)$ are all scalars

$$\hat{x}(i+1) = \hat{x}(i) + \zeta(i) y(i) \quad (12)$$

$$\zeta(i) = (a^2 p(i) + \sigma_{\eta}^2 + a^2 q(i) + 2a^2 r(i))^{-1} (q(i) + r(i))a \quad (14)$$

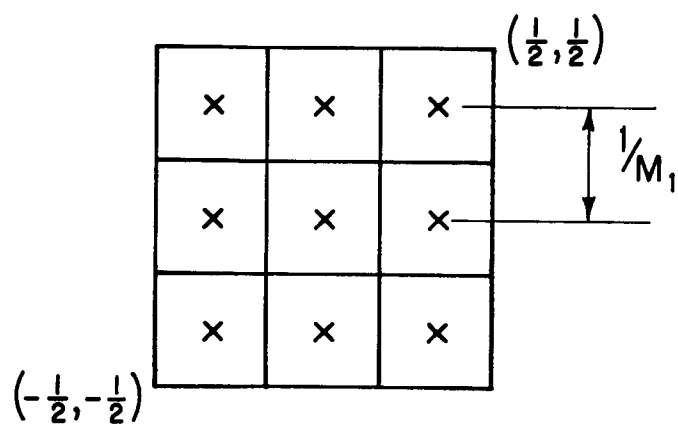


FIG. 3 REPRESENTATION OF THE $M = 3^2$ MESSAGES ON A 2-CUBE. CROSSES DENOTE MESSAGES.

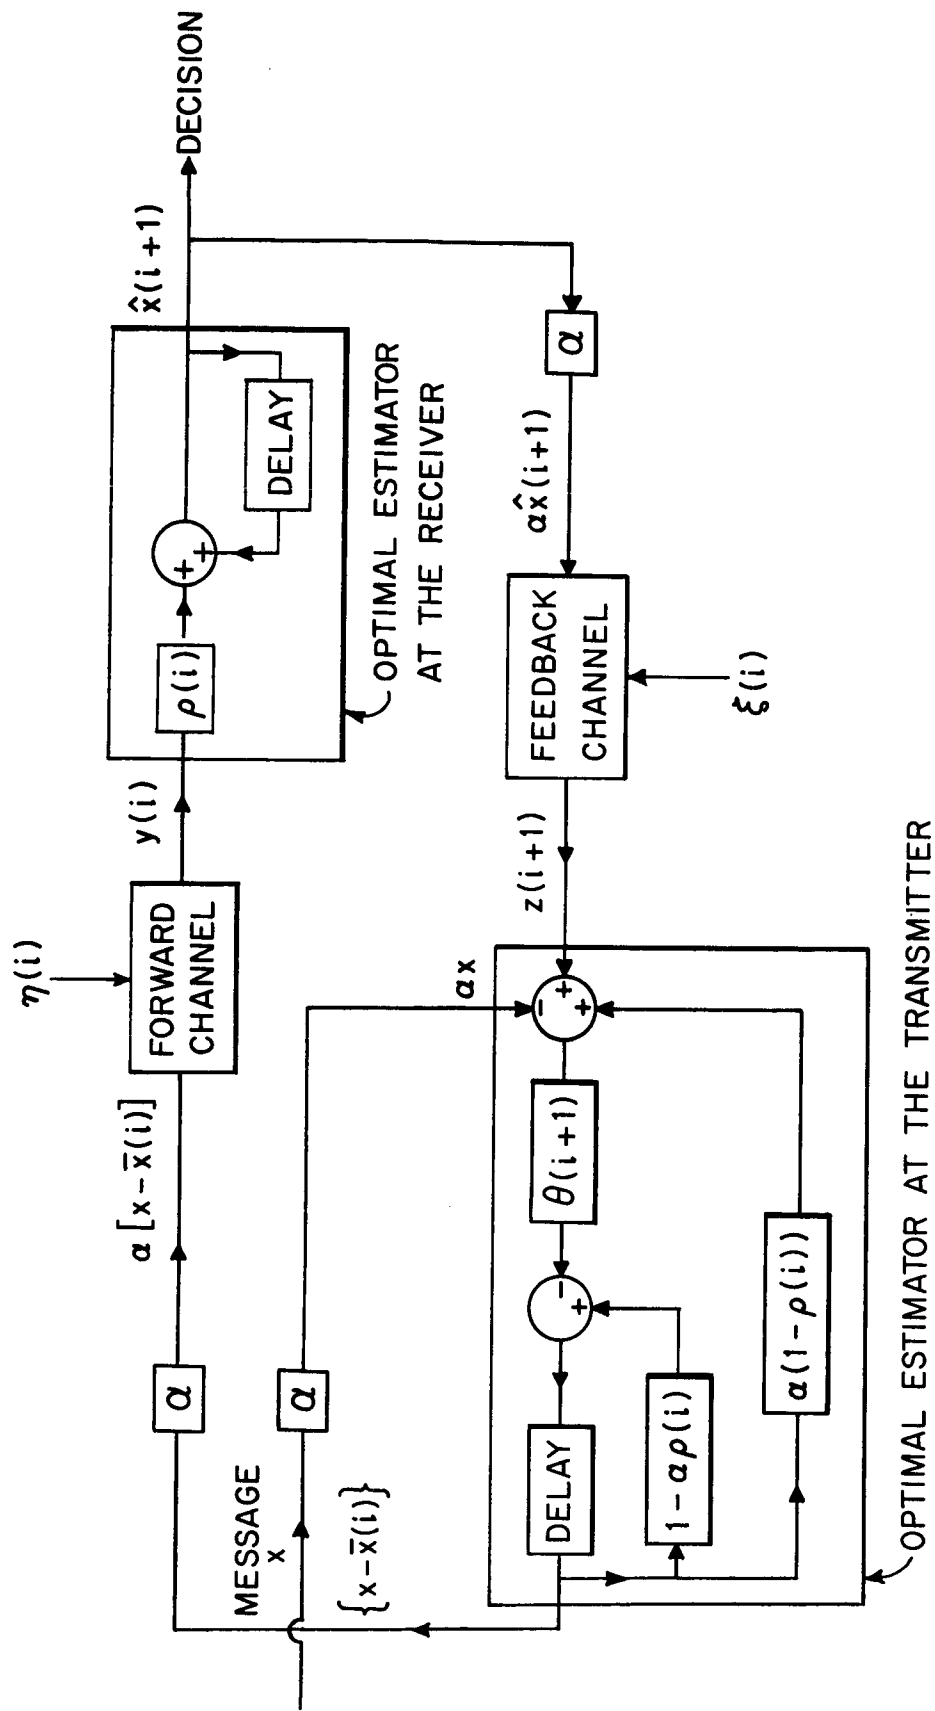


FIG. 4 FEEDBACK CODING SCHEME CS - 1

$$\bar{x}(i+1) = \bar{x}(i) + \zeta(i) a (x - \bar{x}(i)) + \theta(i+1) \{z(i+1) - a\bar{x}(i) - a\zeta(i)(x - \bar{x}(i))\} \quad (13)$$

$$\theta(i) = p(i) a / \sigma_{\xi}^2 \quad (15)$$

$$q(i+1) = \{1 - a \zeta(i)\}^2 q(i) + \zeta^2(i) \{a^2 p(i) + \sigma_{\eta}^2\} - 2a \zeta(i) r(i) \{1 - a \zeta(i)\} \quad (16)$$

$$p(i+1) = \frac{(p(i) + \zeta^2(i) \sigma_{\eta}^2) \sigma_{\xi}^2}{\sigma_{\xi}^2 + a^2 \{p(i) + \zeta^2(i) \sigma_{\eta}^2\}} \quad (17)$$

$$r(i+1) = [(1 - a \zeta(i)) (1 - a \theta(i+1)) r(i) - a \zeta(i) p(i) (1 - a \theta(i+1)) - \sigma_{\eta}^2 \zeta^2(i) (1 - a \theta(i+1))] \quad (18)$$

It should be noted that (12) is stored at the receiver, (13) at the transmitter and the deterministic difference equations (16)-(18) and the definitions (14)-(15) are stored both at transmitter and the receiver.

III. ANALYSIS OF THE CODING SCHEME

Before we demonstrate the possibility of error free transmission, we will analyse the ML (Maximum Likelihood) estimators at the transmitter and the receiver, more closely. It should be emphasized here that the ML estimator at the receiver and the ML (Kalman) estimator at the transmitter are intimately related to each other, even though they are treated separately here.

1. ML estimator of x at the receiver.

Define $\tilde{x}(i) \triangleq \hat{x}(i) - \bar{x}(i)$

= error in the optimal estimator
at the transmitter.

Then the equation for $y(i)$ can be rewritten as:

$$y(i) = a(x - \hat{x}(i)) + \{a \tilde{x}(i) + \eta(i)\} \quad (19)$$

Let $\hat{x}(i)$ = ML estimate of the parameter x at the receiver based on the measurements $y(1), \dots, y(i-1)$

Let us try to compute $\hat{x}(i+1)$ from $\hat{x}(i)$ and $y(i)$

Let

$$\begin{cases} \text{Cov}[x - \hat{x}(i)] \triangleq q(i) I \\ \text{Cov}[\tilde{x}(i)] \triangleq p(i) I \\ E[(x - \hat{x}(i))(\tilde{x}(i))^T] \triangleq r(i) I \end{cases} \quad (20)$$

But the noise $\tilde{x}(i)$ occurring in (19) is not white, though Gaussian.

Therefore, while computing the MLE $\hat{x}(i+1)$, the correlation between $(x - \hat{x}(i))$ and $\tilde{x}(i)$ has to be considered.

By definition, $\hat{x}(i+1)$ is obtained by minimizing J w.r.t u

$$\begin{aligned} J &= \left\| (u - \hat{x}(i)), (\alpha \tilde{x}(i) + \eta(i)) \right\|^2 \\ &= \left\| (u - \hat{x}(i)), (y(i) - \alpha \hat{x}(i) + \alpha \tilde{x}(i)) \right\|^2 \\ &= \begin{bmatrix} q(i) I & \alpha r(i) I \\ \alpha r(i) I & (\alpha^2 p(i) + \sigma_\eta^2) I \end{bmatrix}^{-1} \\ &= \begin{bmatrix} q(i) I & \alpha r(i) I \\ \alpha r(i) I & (\alpha^2 p(i) + \sigma_\eta^2) I \end{bmatrix}^{-1} \end{aligned}$$

By the straightforward minimization, we obtain

$$\hat{x}(i+1) = \hat{x}(i) + \zeta(i) y(i) \quad (21)$$

where the scalar $\zeta(i)$ has been defined earlier in (14). At the i^{th} stage, error in the estimator = $\{x - \hat{x}(i)\}$.

From (21) we can write the recursive relation for $(x - \hat{x}(i))$

$$\begin{aligned} x - \hat{x}(i+1) &= \{1 - \alpha \zeta(i)\} \{x - \hat{x}(i)\} \\ &\quad - \zeta(i) (\alpha \tilde{x}(i) + \eta(i)) \end{aligned} \quad (22)$$

From (22) and (20) we can obtain the recursive equation (16) for the scalar $q(i)$.

In the appendix it is shown that asymptotically

$$q(i) \approx \frac{\sigma_\eta^2}{2\alpha_i} \left\{ 1 + 2\sqrt{\frac{N_b}{N_o}} + 2\frac{N_b}{N_o} \right\}, \quad \frac{N_b}{N_o} < 1 \text{ and sufficiently small}$$

2. Optimal Estimator of $\hat{x}(i+1)$ at the Transmitter

Rewriting (21)

$$\hat{x}(i+1) = \hat{x}(i) + \alpha \xi(i) (x - \hat{x}(i)) + \xi(i) \eta(i) \quad (23)$$

Equation for the measurement $z(i+1)$ is

$$z(i+1) = \alpha \hat{x}(i+1) + \xi(i+1) \quad (24)$$

We want to evaluate the ML estimator of the random vector $\hat{x}(i+1)$ given the measurements $z(1), \dots, z(i+1)$. Rewriting (23)

$$\hat{x}(i+1) = \bar{x}(i) + \alpha \xi(i) (x - \bar{x}(i)) + \tilde{x}(i) + \xi(i) \eta(i) \quad (25)$$

Hence, by definition, given $\hat{x}(i)$ and $z(i+1)$, $\hat{x}(i+1)$ is obtained by minimizing J w.r.t vector u

$$J = \left\| u - \bar{x}(i) + \alpha \xi(i) (x - \bar{x}(i)) \right\|^2 \left(\frac{1}{p(i) + \xi^2(i) \sigma_\eta^2} \right) + \left\| z(i+1) - \alpha u \right\|^2 \frac{1}{\sigma_\xi^2} \quad (26)$$

Performing the minimization, we get

$$\bar{x}(i+1) = \bar{x}(i) + \alpha \xi(i) (x - \bar{x}(i)) + \theta(i+1) [z(i+1) - \alpha \bar{x}(i) - \alpha \xi(i) (x - \bar{x}(i))] \quad (27)$$

where

$$\theta(i+1) = \alpha p(i+1) / \sigma_\xi^2$$

and the recursive equation for $p(i)$ is given earlier.

It should be noted that

$$\bar{x}(i+1) = E(\hat{x}(i+1) / z(1), \dots, z(i+1); x)$$

since the ML estimator is identical with the Kalman-Bucy estimator.

Let

$$\tilde{\mathbf{x}}(i) = \hat{\mathbf{x}}(i) - \bar{\mathbf{x}}(i) = \text{error in the optimal estimate.}$$

Subtracting (25) from (27) we get the difference equation for the error

$$\tilde{\mathbf{x}}(i)$$

$$\tilde{\mathbf{x}}(i+1) = \tilde{\mathbf{x}}(i) \{1 - \alpha \theta(i+1)\} + \xi(i) \eta(i) (1 - \alpha \theta(i+1)) - \theta(i+1) \xi(i+1) \quad (28)$$

we can derive the recursive relation for $p(i)$ from (28) and the various definitions. Alternatively, we can invoke the Kalman-Bucy theory to get the relation (17). Similarly using (28) and (22), we can get the recursive relation (18) for $r(i)$

Asymptotically

$$p(i) = \frac{\sigma^2 \eta^2}{\alpha^2 i} \sqrt{\frac{N_b}{N_o}} \left(1 + \frac{3}{2} \sqrt{\frac{N_b}{N_o}}\right), \quad (N_b/N_o) < 1$$

$$r(i) = -\frac{\sigma^2 \eta^2}{\alpha^2 i} \sqrt{\frac{N_b}{N_o}} \left(1 + \frac{3}{2} \sqrt{\frac{N_b}{N_o}}\right), \quad (N_b/N_o) < 1$$

These relations have been proved in the appendix 1.

From these we obtain (in appendix)

$$E[(\mathbf{x} - \bar{\mathbf{x}}(i)) (\mathbf{x} - \bar{\mathbf{x}}(i))^T] = \frac{\sigma^2 \eta^2}{\alpha^2 i} \left\{ 1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o} \right\} \mathbf{I} \quad (29)$$

3. Determination of the Criticle Transmission Rate R_c

THEOREM:

Let P_{AV} be the constraint on the average transmitted power.

Let $(N_o/2)$ and $(N_b/2)$ be respectively the two-sided spectral densities of the additive white Gaussian noises in the forward and backward channel respectively. Suppose one of $M \triangleq \exp(RT)$ messages has to be trans-

mitted over a time T seconds (where R is known as the transmission rate). Suppose the coding scheme mentioned in Section II is used and the maximum likelihood decision rule is used to obtain the decision.

Let $P_e(M, T)$ be the probability of error. Then there exists a constant

$$R_c \text{ such that } \lim_{T \rightarrow \infty} P_e(M = \exp(RT), T) = \begin{cases} 0 & \text{if } R < R_c \\ 1 & \text{if } R > R_c \end{cases}$$

An approximate expression for R_c is

$$R_c = \left(\frac{1}{1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o}} \right) \cdot \left(\frac{P_{AV}}{N_o} \right)$$

Proof: Suppose that during the time T , N measurements $y(1), \dots, y(N)$ have been taken at the receiver, the latest measurement being $y(N)$. Since all the M messages are equally probable, the decision rule $d(\cdot)$ at the receiver is:

$$d(\hat{x}(N+1)) = m^{(j)} \quad \text{if } |(x^{(j)} - \hat{x}(N+1))_i| \leq |(x^{(k)} - \hat{x}(N+1))_i|$$

$$\forall i=1, \dots, D \text{ and } \forall k=1, \dots, M.$$

$$\text{i.e., } d(\hat{x}(N+1)) = m^{(j)} \quad \text{if } -1/2M_1 < (x^j - \hat{x}(N+1))_i < 1/2M_1$$

$$\forall i=1, \dots, D$$

where $M_1 = M^{1/D}$ (an integer)

Recall that $\text{Cov}(x - \hat{x}(N+1)) \approx \frac{\sigma^2 \eta}{a^2} \frac{1}{N} (1 + k_q)$, where $k_q = 2\sqrt{\frac{N_b}{N_o}}$

Let the probability of error $\triangleq P_e(M, T)$

$$P_c = 1 - P_e (M, T)$$

$$\begin{aligned} & \hat{x} (N+1) + (1/2M_1) \\ & = \left[\int \frac{\sqrt{Na}}{\sqrt{(2\pi)\sigma_\eta^2(1+k_q)}} \exp\left\{ - \frac{N\sigma^2}{2\sigma_\eta^2(1+k_q)} (u_j - \hat{x}_j(N+1))^2 \right\} du_j \right]^D \\ & \hat{x} (N+1) - (1/2M_1) \\ & = \left\{ \operatorname{erf} \left(\frac{a}{2\sqrt{2\sigma_\eta^2(1+k_q)}} \frac{\sqrt{N}}{M_1} \right) \right\}^D \end{aligned}$$

$$\text{Let } M(T) \triangleq \exp (RT) = N^{D(1-\epsilon)/2}$$

$$P_c = \left\{ \operatorname{erf} \left(\frac{a}{2\sqrt{2\sigma_\eta^2(1+k_q)}} N^{\epsilon/2} \right) \right\}^D$$

Hence

$$\lim_{T \rightarrow \infty} P_e(M, T) = \begin{cases} 0 & \epsilon > 0 \\ 1 & \epsilon < 0 \end{cases}$$

Therefore, the optimal signalling rate R_c is obtained by setting

$$M(T) = N^{D/2}$$

$$R_c \triangleq \frac{\ln M(T)}{T} = \frac{D \ln N}{2T} \quad (30)$$

P_{AV} = the average transmitted power

$$\begin{aligned} & = E \left[\frac{1}{T} \int_0^T s^2(t) dt \right] \\ & = \frac{1}{T} E \left[\sum_{i=1}^N a^2 \| x - \bar{x} (i) \|^2 \right] \end{aligned}$$

Let us assume that x_j is uniformly distributed in the interval $(-1/2, 1/2)$ for every $j=1, \dots, D$. Since $\bar{x}(1)=0$, $E(x_j^2) = 1/12$ for all $j=1, \dots, D$.

we know from (29) that

$$E \| x - \bar{x}(i) \|^2 \approx \frac{D\sigma^2}{a^2 i} \left(1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o} \right) \triangleq \sigma^2 / (a^2 i)$$

where

$$\sigma^2 \triangleq \sigma_\eta^2 \left\{ 1 + \sqrt{N_b/N_o} + \frac{1}{2} \frac{N_b}{N_o} \right\}$$

$$P_{AV} = \frac{a^2 D}{T} \left[\frac{1}{12} + \frac{\sigma^2}{a^2} \left(\sum_{i=1}^N \frac{1}{i} + A_1 \right) \right]$$

where A_1 is the error due to the use of approximation formula.

But $\sum_{i=1}^N \frac{1}{i} \approx \ln N + A_2$, $A_2 = \text{Euler-Maschorini constant}$

Substituting for T from (30) we get

$$P_{AV} = \frac{2R_c}{\ln N} \left\{ \sigma^2 \ln N + \frac{a^2}{12} + \sigma^2 (A_1 + A_2) \right\} \quad (31)$$

Hence $\lim_{N \rightarrow \infty} P_{AV} = 2R_c \sigma^2$

From the definition of σ^2 , we obtain

$$R_c = \left(\frac{1}{1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o}} \right) \left(\frac{P_{AV}}{N_o} \right)$$

IV. PROPERTIES OF THE CODING SCHEME CS-1

1. Probability of error P_e for finite T with an optimal choice for the gain a .

Let

$$C = P_{AV}$$

and

$$C_2 \triangleq \frac{R_c}{C} = \frac{1}{1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o}}$$

For given α and large T the probability of error is given by

$$P_e = 1 - \left\{ \operatorname{erf} \left(\frac{\alpha}{2\sqrt{N_0}(1+k_q)} \frac{\sqrt{N}}{M^{1/D}} \right) \right\} \quad (32)$$

Let $M = e^{RT}$

From (31) we obtain

$$C = \frac{D}{T} \left[\frac{\alpha^2}{12N_0} + \frac{1}{2C_2} (\ln N + A_1 + A_2) \right]$$

Rewriting the above equation by neglecting A_1 and A_2 , we have

$$N \approx \exp \left[2C_2 \left(\frac{CT}{D} - \frac{\alpha^2}{12N_0} \right) \right] \quad (33)$$

Substituting for N from (33) in (32) and minimizing the overall expression for P_e with respect to α we get the optimal value of α as

$$\alpha_{\text{opt}}^2 = \frac{6N_0}{C_2} \quad (34)$$

We can substitute the value of α_{opt} in (32) and simplify it by noting that in the expression for N given by (33), $(\alpha^2/12N_0)$ can be neglected w.r.t (CT/D)

Let

$$\begin{aligned} v_{\text{opt}} &\triangleq \frac{\alpha_{\text{opt}}}{2\sqrt{N_0}(1+k_q)} \frac{\sqrt{N}}{M^{1/D}} \\ &= \left\{ \frac{3}{2} \frac{1}{C_2(1+k_q)} \right\}^{1/2} \exp \left\{ \frac{R_c - R}{D} T \right\} \\ &= \left(\frac{3C_3}{2} \right)^{1/2} \exp \left\{ \left(\frac{R_c}{R} - 1 \right) \frac{RT}{D} \right\} \end{aligned}$$

where

$$C_3 \triangleq \frac{1}{C_2(1+k_q)}$$

$$= \frac{1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o}}{1 + 2\sqrt{\frac{N_b}{N_o}} + 2 \frac{N_b}{N_o}}$$

Then $P_e (M=\exp(RT), T)$

$$\triangleq 1 - \{ \text{erf}(v_{\text{opt}}) \}^D$$

$$\approx [D \exp(-v_{\text{opt}}^2)] \sqrt{\pi} v_{\text{opt}}$$

$$= \frac{D \exp \left[-\frac{3}{2} C_3 \exp \left\{ \left(\frac{R_c}{R} - 1 \right) \frac{2RT}{D} \right\} \right]}{\frac{3\pi C_3}{2} \exp \left\{ \left(\frac{R_c}{R} - 1 \right) \frac{RT}{D} \right\}} \quad (35)$$

(35) is the basic expression for the probability of error for

finite T . Note that for given T , N can be determined from (33) and

hence (T/N) , the time per iteration is also determined.

2. Noiseless Feedback Channel

Here $\xi(i) = 0$ and hence

$$\text{Cov}[\xi(i)] \triangleq \sigma_\xi^2 I = 0$$

$$\text{Cov}[\tilde{x}(i)] \triangleq p(i)I = 0$$

$$E[\{x - \hat{x}(i)\} \{\tilde{x}(i)\}^T] \triangleq r(i)I = 0$$

In this case, the recursive formula (13) becomes

$$\bar{x}(i+1) = z(i+1) \quad \text{Since } \theta(i+1) = 1/a \quad \forall i < \infty$$

$$= \hat{x}(i+1)$$

Correspondingly, the weighting factor $\xi(i)$ in (12) becomes

$$\xi(i) = 1/a_i$$

In other words, (12) becomes

$$\hat{x}(i+1) = \hat{x}(i) + \frac{1}{a_i} y(i) \quad (36)$$

This coding scheme will be referred to as CS-2

This simplified coding scheme is given in figure (5). Note that in this scheme $R_c = C$ and that the expression (34) for probability of error (when time T is finite) can be simplified by noting that $C_3 = 1$.

This coding scheme is nothing but an extension of the coding scheme in [6] to D -dimensional signals.

V. ALTERNATE CODING SCHEME FOR NOISY CHANNEL

This coding scheme is very similar to the one considered all along except that the recursive formulae for $\hat{x}(i)$ and $\bar{x}(i)$ are simpler. This coding scheme will be referred to as CS-3.

$$\hat{x}(i+1) = \hat{x}(i) + \frac{1}{a_i} y(i) \quad (37)$$

$$\bar{x}(i+1) = \bar{x}(i) + \frac{x - \bar{x}(i)}{i} + \frac{p(i+1)a}{\sigma_\xi^2} [z(i+1) - a\bar{x}(i) - \frac{x - \bar{x}(i)}{i}] \quad (38)$$

where

$$p(i+1) = \frac{\{p(i) + (\sigma_\eta^2 / a^2 i^2)\} \sigma_\xi^2}{\sigma_\xi^2 + a^2 p(i) + \frac{\sigma_\eta^2}{i^2}} \quad (39)$$

In this case the critical rate R_c is given by the same formula as before.

The error covariance $\text{Cov}[x - \hat{x}(i)]$ which determines the error probability is given by the relation

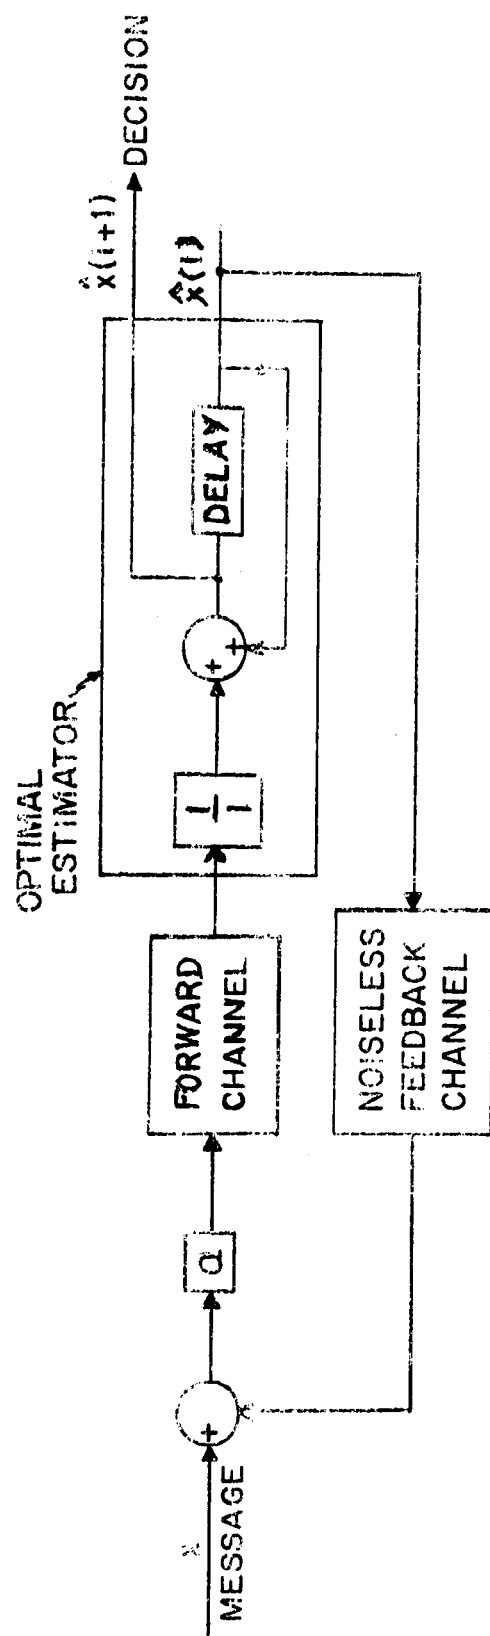


FIG. 5 FEEDBACK CODING SCHEME CS-2 WITH NOISELESS FEEDBACK CHANNEL.

$$\text{Cov} [x - \hat{x} (i)] = \frac{\sigma_{\eta}^2}{a^2 i} \left[1 + 2\sqrt{\frac{N_b}{N_o}} + \frac{N_b}{N_o} \right] I \quad (40)$$

The other relevant covariance matrices are given below:

$$\text{Cov} [\tilde{x} (i)] = \frac{\sigma_{\eta}^2}{a^2 i} \left[\sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o} \right] I \quad (41)$$

$$E[(x - \hat{x} (i)) (\tilde{x} (i))^T] = - \frac{\sigma_{\eta}^2}{a^2 i} \left[\sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o} \right] I \quad (42)$$

$$\text{Cov} [x - \hat{x} (i)] = \frac{\sigma_{\eta}^2}{a^2 i} \left[1 + 2\sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o} \right] I \quad (43)$$

The derivations of these formulae can be found in Appendix 2.

As before, an expression can be found for the probability of error when time T is finite and we can choose the gain a to minimize this probability of error. The expression for the optimal value of the gain, a_{opt} , is given below

$$a_{\text{opt}}^2 = 6 N_o / C_2$$

The probability of error is given by the formula:

$$P_e (M = e^{RT}, T) = \frac{\text{Dexp} \left[-\frac{3}{2} C_3 \exp \left\{ \left(\frac{R_c}{R} - 1 \right) \frac{2RT}{D} \right\} \right]}{\sqrt{\frac{3\pi C_3}{2}} \exp \left\{ \left(\frac{R_c}{R} - 1 \right) \frac{RT}{D} \right\}} \quad (44)$$

$$\text{where } C_3 = \frac{1 + 2\sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o}}{1 + 2\sqrt{\frac{N_b}{N_o}} + 2 \frac{N_b}{N_o}} \quad (45)$$

The details are omitted since they are very similar to the ones used earlier.

The most intriguing feature of this coding scheme is that the probability of error is less than that for CS-1 for Same T and other parameters. This is due to the fact that $\text{Cov} [x - \hat{x}(i)]$ for CS-3 is slightly smaller than the corresponding quantity in CS-1. Even though this is intriguing, it can be easily explained by noting that the maximum likelihood estimate $\hat{x}(i)$ in CS-1 is computed from a set of dependent measurements $y(1), \dots, y(i-1)$ and in this case the MLE estimate is not a minimum variance estimate. It is interesting to note that the estimate $\hat{x}(i)$ of x in CS-3 is obtained by minimizing J with respect to u .

$$J = E \left[\sum_{j=1}^{i-1} \| y(i) - u - \hat{x}(j) \|^2 / y(1), \dots, y(i-1) \right]$$

Hence the estimate $\hat{x}(i)$ in CS-3 can be looked upon as the minimum variance estimate and hence its variance must be less than that of $\hat{x}(i)$ in CS-1 which is a MLE.

VI. COMPARISON

The best codes which use only the forward channel are the simplex codes which behave like the orthogonal codes for large M . For these codes, the probability of error is bounded by (46) [7].

$$\log_{10} P_e \leq \log_{10}^2 - E'(R) \left(\frac{RT}{\log_e 10} \right)$$

where

$$E'(R) = \begin{cases} \left(\frac{1}{2} - \frac{C}{R} - 1 \right) & \text{if } 0 < R/C \leq 1/4 \\ \left(\sqrt{\frac{C}{R}} - 1 \right)^2 & \text{if } 1/4 \leq R/C < 1 \end{cases}$$

and $RT \triangleq \ln M$ = amount of information to be conveyed over a period of T seconds.

In the coding scheme CS-1

$$\log_{10} P_e = \log_{10} \left(\sqrt{\frac{2}{3\pi C_3}} D \right) - (\log_{10} e) \frac{3}{2} C_3 \exp \left\{ \left(\frac{R_c}{R} - 1 \right) \frac{2RT}{D} \right\} - (\log_{10} e) \left(\frac{R_c}{R} - 1 \right) \frac{RT}{D} \quad (47)$$

where

$$C_3 = \frac{1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o}}{1 + 2\sqrt{\frac{N_b}{N_o}} + 2 \frac{N_b}{N_o}} \quad (48)$$

In the coding scheme CS-3

$$\log_{10} P_e = \log_{10} \left(\sqrt{\frac{2}{3\pi C_3}} D \right) - (\log_{10} e) \left(\frac{R_c}{R} - 1 \right) \frac{RT}{D} - (\log_{10} e) \frac{3}{2} C_3 \exp \left\{ \left(\frac{R_c}{R} - 1 \right) \frac{2RT}{D} \right\} \quad (49)$$

where

$$C_3 = \frac{1 + \sqrt{\frac{N_b}{N_o}} + \frac{1}{2} \frac{N_b}{N_o}}{1 + 2\sqrt{\frac{N_b}{N_o}} + \frac{N_b}{N_o}} \quad (50)$$

and

$$R_c = \frac{C}{1 + \frac{1}{2} \frac{N_b}{N_o} + \sqrt{\frac{N_b}{N_o}}} \quad ; \quad C \triangleq P_{AV} / N_o$$

Inspection of expressions (46)-(50) establishes unambiguously the superiority of the coding schemes CS-1 and CS-3 over the orthogonal codes. In Figure 6, for a fixed R/C and D , the probability of error is plotted on a logarithmic scale versus (RT) in nats for various values of (N_b/N_o) , the ratio of feedback noise power to forward noise power.

Another way of comparison is to compare the time delay T required to achieve the same probability of error for the different coding schemes.

Let $P_e = 1 \times 10^{-7}$, $R/C = 0.6$, $C = 1 \text{ nat / sec}$, $D=1$

Let $N_0 = 10$ joules. We can obtain the corresponding value of RT in nats from the formulae given earlier and hence compute the time delay T for the same probability of error for the different coding schemes.

Simplex codes: $RT = 183.5 \text{ nats}$; $T = 306 \text{ seconds}$

Coding Schemes CS-1 and CS-3

$\frac{N_b}{N_0}$	$\frac{R_c}{C}$	Scheme CS-1		Scheme CS-3	
		RT	T secs	RT	T secs
0.1	0.732	5.825	9.7	5.65	9.42
0.02	0.87	2.7	4.5	2.64	4.4
0.0	1.0	1.68	2.79	1.68	2.79

We will also make a few remarks on the advantages and disadvantages of having a large D , the dimensions of the elementary signals in the feedback coding scheme. It is evident from (47) that for same RT , larger D implies smaller P_e . In order to offset this fact, consider the number of iterations N which occur in time T .

$$N = \exp \left\{ \frac{2R_c}{R} \frac{RT}{D} \right\}$$

For fixed RT , larger D implies smaller N . In other words, the ratio of T/N , the time per iteration or the "pulse width" will increase with D .

This clearly is an advantage since this reduces the "cost" of the system in some sense.

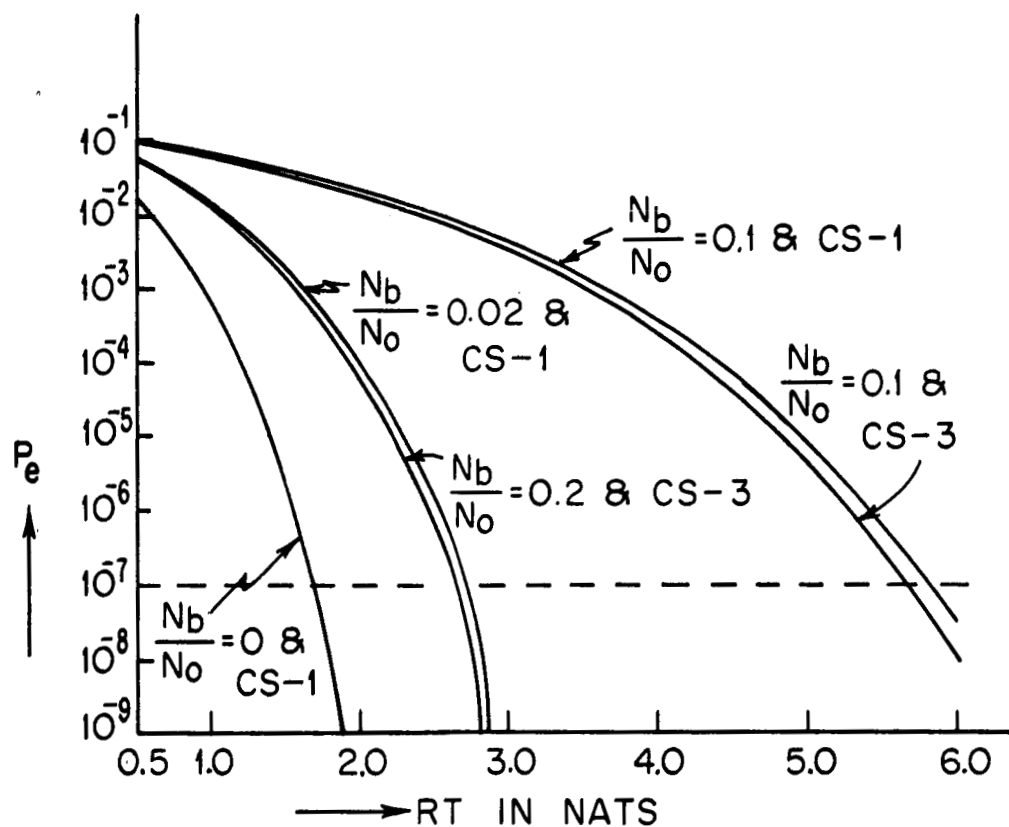


FIG. 6: PROBABILITY OF ERROR P_e AS A FUNCTION OF THE AMOUNT OF INFORMATION (RT) IN NATS FOR VARIOUS VALUES OF (N_b/N_0) USING THE CODING SCHEMES CS-1 AND CS-3.

VII. CONCLUSIONS

Feedback coding schemes using a noisy feedback channel and D -dimensional elementary signals have been developed in which to achieve a zero error transmission rate R_c nearly equal to the channel capacity C . We have also analyzed their performance when the transmission time T is finite and showed their superiority over traditional methods.

The only drawbacks of the coding schemes are the requirements of infinite bandwidth for the signal and infinite power at the receiver if time T is infinite. But for finite time T both these objections are not applicable. Moreover, in many space communication problems there is no limit on the available power or the receiver. Hence, the only important drawback is the requirement of infinite bandwidth for the signal. Methods of overcoming these disadvantages are presently under consideration.

REFERENCES

- [1] C. E. Shannon, "Probability of error for optimal codes in a Gaussian Channel, "Bell Sys. Tech. J. 38 3, 1959, pp.611-656.
- [2] C. E. Shannon, "The Zero Error Capacity of a Noisy Channel, " IRE Trans. on Inf. Theory IT-2 3, Sept. 1956, pp.8-19.
- [3] P. E. Green, "Feedback Communication Systems, "Lectures on Communication System Theory Baghdady (ed.) McGraw-Hill, 1961.
- [4] A. J. Viterbi "The Effect of Sequential Decision Feedback on Communication Over the Gaussian Channel, " Info. and Control 8,1 Feb. 1965.
- [5] G. L. Turin, "Signal design for sequential detection systems, " Int. Tech Memo-M-69, University of California, Berkeley, May 1964.
- [6] J.P. M. Schalkwijk and T. Kailath, "A Coding Scheme for Additive Noise Channels with Feedback. " Part I: "No bandwidth constraint, " Proc. IEEE Sym. on Inf. Theory, Los Angeles, Jan 31-Feb. 2, 1966. Also: Report No. 10 S. E. L. by the first author with same title. (1965).
- [7] J. M. Wozencroft and I. M. Jacobs, "Principles of Communication Engineering" Wiley, 1965.
- [8] R. E. Kalman and R. S. Bucy, "New Results in Linear Filtering and Prediction Theory. " J-Basic Eng., ASME, 83D (1961), 95-108.

APPENDIX I

The asymptotic expression for the solution of the difference equations (16)-(18) will be given here.

It is not too hard to show that the homogeneous difference equations (16)-(18) have zero as the equilibrium state. Hence, $p(i)$, $q(i)$ and $r(i)$ will be expanded in power series in terms of $\frac{1}{i}$

$$\text{Let } \begin{cases} q(i) = \frac{\sigma^2}{a^2} \frac{1}{i} (1+k_q) + 0\left(\frac{1}{i}\right) \\ p(i) = \frac{\sigma^2}{a^2} \frac{1}{i} k_p + 0\left(\frac{1}{i}\right) \\ r(i) = \frac{\sigma^2}{a^2} \frac{1}{i} k_r + 0\left(\frac{1}{i}\right) \end{cases} \quad \dagger \quad (\text{A-1})$$

$$\text{Let } \sigma_{\xi}^2 / \sigma_{\eta}^2 \triangleq N_b / N_o \triangleq K_{bo}$$

From (A-1), one can easily show that

$$\begin{cases} a\xi(i) = (1+k_q + k_r) \frac{1}{i} + 0\left(\frac{1}{i}\right) \\ \theta(i)a = \frac{k_p}{K_{bo}} \frac{1}{i} + 0\left(\frac{1}{i}\right) \end{cases} \quad (\text{A-2})$$

Moreover, we will use the following expansion throughout the Appendix.

$$\frac{1}{i+1} = \frac{1}{i} - \frac{1}{i^2} + 0\left(\frac{1}{i^2}\right)$$

$$\dagger \text{ By definition, } a_i \triangleq 0(b_i) \text{ if } \lim_{i \rightarrow \infty} \frac{a_i}{b_i} = 0$$

From (16) , using (A-1) and (A-2) , we get

$$(1+k_q) \left(\frac{1}{i} - \frac{1}{i^2} \right) = \left[\frac{1}{i} (1+k_q) + \frac{1}{i^2} \{ (1+k_q+k_r)^2 - 2(1+k_q+k_r)(1+k_q) \right. \\ \left. - 2(1+k_q+k_r)(1+k_q) - 2k_r(1+k_q+k_r) \} + 0\left(\frac{1}{i^2}\right) \right]$$

Equating the coefficients of $\frac{1}{i^2}$ on either side of the above equation, we get

$$(k_q+k_r)^2 + (k_q+2k_r) = 0 \quad (A-3)$$

Let us consider equation (17) .

$$k_p \left(\frac{1}{i} - \frac{1}{i^2} \right) = \frac{K_{bo} \left\{ \frac{1}{i} k_p + \frac{1}{i^2} (1+k_q+k_r)^2 \right\}}{\left\{ K_{bo} + \frac{1}{i} k_p + \frac{1}{i^2} (1+k_q+k_r)^2 \right\}} + 0 \left(\frac{1}{i^2} \right) \\ = \frac{1}{i} k_p + \frac{1}{i^2} \left\{ (1+k_q+k_r)^2 - \frac{1}{K_{bo}} k_p^2 \right\} + 0 \left(\frac{1}{i^2} \right)$$

Equating the coefficients of $\frac{1}{i^2}$ on both sides of the above equation, we get

$$k_p^2 - K_{bo} k_p - (1+k_q+k_r)^2 K_{bo} = 0 \quad (A-4)$$

Let us simplify (18)

$$k_r \left(\frac{1}{i} - \frac{1}{i^2} \right) = \left[\frac{1}{i} k_r - \frac{1}{i^2} \left\{ (1+k_q+k_r) k_r + \frac{k_p k_r}{K_{bo}} + (1+k_q+k_r) k_p + (1+k_q+k_r)^2 \right\} \right. \\ \left. + 0 \left(\frac{1}{i^2} \right) \right]$$

Equating the coefficients of $\left(\frac{1}{i^2}\right)$ on both sides of the above equation, we get

$$\left[1+k_p + \frac{k_p k_r}{K_{bo}} + 2(k_q+k_r) + (k_q+k_r)(k_q+2k_r+k_p) \right] = 0 \quad (A-5)$$

We have to solve (A-3)-(A-5) simultaneously for k_p, k_q and k_r . The simplest way is to assume power series solutions for all of them in terms of $\sqrt{K_{bo}}$.

Let

$$\sqrt{K_{bo}} = d$$

Let

$$\begin{cases} k_p = g_1 d + g_2 d^2 + 0(d^2) \\ k_r = g_3 d + g_4 d^2 + 0(d^2) \\ k_q = g_5 d + g_6 d^2 + 0(d^2) \end{cases} \quad (A-6)$$

Parameters g_1 through g_6 have to be determined. Substitute (A-6) in (A-3) and equate the coefficients of the two most significant powers of d on either side of equation

$$\begin{cases} g_5 + 2g_3 = 0 \\ g_6 + 2g_4 + (g_5 + g_3)^2 = 0 \end{cases} \quad (A-7)$$

Repeating the same process with (A-4) and (A-6) we get

$$\begin{cases} g_1^2 - 1 = 0 \\ 2g_1 g_2 - g_1 - 2(g_3 + g_5) = 0 \end{cases} \quad (A-8)$$

Repeating the same process with (A-5) and (A-6), we get

$$\begin{cases} g_1 g_3 = -1 \\ g_2 g_3 + g_1 g_4 + g_1 + 2(g_3 + g_5) = 0 \end{cases} \quad (A-9)$$

Solving the equations (A-7) - (A-9) for g_1, \dots, g_6 we get

$$\begin{aligned} g_1 &= 1 & g_3 &= -1 & g_5 &= 2 \\ g_2 &= 3/2 & g_4 &= -3/2 & g_6 &= 2 \end{aligned}$$

Hence

$$\text{Cov} [\tilde{x}(i)] \approx \frac{\sigma^2 \eta}{a^2 i} k_p = \frac{\sigma^2 \eta}{a^2 i} (\sqrt{K_{bo}} + \frac{3}{2} K_{bo}) I$$

$$\begin{aligned} \text{Cov} [x - \hat{x}(i)] &\approx \frac{\sigma^2 \eta}{a^2 i} (1 + k_q) I \\ &= \frac{\sigma^2 \eta}{a^2 i} (1 + 2\sqrt{K_{bo}} + 2K_{bo}) I \end{aligned}$$

$$\begin{aligned} E[\{x - \hat{x}(i)\} \{ \tilde{x}(i) \}^T] &\approx \frac{\sigma^2 \eta}{a^2 i} k_r I \\ &= - \frac{\sigma^2 \eta}{a^2 i} (\sqrt{K_{bo}} + \frac{3}{2} K_{bo}) I \end{aligned}$$

Finally

$$\begin{aligned} \text{Cov} [x - \bar{x}(i)] &\triangleq \text{Cov} [x - \hat{x}(i) + \tilde{x}(i)] \\ &= \frac{\sigma^2 \eta}{a^2 i} (1 + k_q + k_p + 2k_r) I \\ &= \frac{\sigma^2 \eta}{a^2 i} (1 + \sqrt{K_{bo}} + \frac{1}{2} K_{bo}) I \end{aligned}$$

APPENDIX 2

We will establish the covariance formula (40-43) for coding scheme CS-3 by following the methods similar to those in Appendix 1.

We will use the expansions (A-1) in Appendix 1.

We know that

$$\xi(i) = 1/ai$$

We can easily show that

$$\theta(i) a = \frac{1}{i} \frac{k_p}{K_{bo}} + O\left(\frac{1}{i}\right)$$

From (16) , using (A-1) , we get

$$(1+k_q) \left(\frac{1}{i} - \frac{1}{i^2} \right) = \left[\frac{1}{i} (1+k_q) + \frac{1}{i^2} \{1-2(1+k_q) - 2k_r\} + O\left(\frac{1}{i^2}\right) \right]$$

Equating the coefficients of $\frac{1}{i^2}$ on either side we get

$$k_q + 2k_r = 0$$

(A-10)

Let us simplify (17) using (A-1)

$$\begin{aligned} k_p \left(\frac{1}{i} - \frac{1}{i^2} \right) &= \frac{K_{bo} \left\{ \frac{1}{i} k_p + \frac{1}{i^2} \right\}}{K_{bo} + \frac{1}{i} k_p + \frac{1}{i^2}} + O\left(\frac{1}{i^2}\right) \\ &\approx \frac{1}{i} k_p + \frac{1}{i^2} \left\{ 1 - \frac{k_p^2}{K_{bo}} \right\} + O\left(\frac{1}{i^2}\right) \end{aligned}$$

Equating the coefficients of $\frac{1}{i^2}$ on either side, we get

$$\{k_p^2 - K_{bo} k_p - K_{bo}\} = 0$$

(A-11)

Let us simplify (18) using (A-1)

$$k_r \left(\frac{1}{i} - \frac{1}{i^2} \right) = \left[\frac{1}{i} k_r - \frac{1}{i^2} \left\{ k_r + \frac{k_p k_r}{K_{bo}} + k_p + 1 \right\} + O\left(\frac{1}{i^2}\right) \right]$$

Equating the coefficients of $(\frac{1}{i^2})$ on both sides of the above equation, we get

$$\{1 + k_p + \frac{k_p k_r}{K_{bo}}\} = 0 \quad (A-12)$$

Comparing (A-11) and (A-12), we get

$$k_r = -k_p \quad (A-13)$$

Solving for k_p from (A-11) and retaining terms $\sqrt{K_{bo}}$ and K_{bo} , we get

$$k_p = \sqrt{K_{bo}} + \frac{1}{2} K_{bo}$$

$$k_r = -\sqrt{K_{bo}} - \frac{1}{2} K_{bo}$$

$$k_q = 2\sqrt{K_{bo}} + K_{bo}$$

These relations in conjunction with (A-1) give the expressions (40)-(42).

In order to prove (43) note that

$$\begin{aligned} \text{Cov} [x - \bar{x} \ (i)] &\triangleq \text{Cov} [x - \hat{x} \ (i) + \tilde{x} \ (i)] \\ &= \{q(i) + p(i) + 2r(i)\} I \\ &= \frac{\sigma^2}{a^2 i} \{1 + k_q + k_p + 2k_r\} I \\ &= \frac{\sigma^2}{a^2 i} \{1 + \sqrt{K_{bo}} + \frac{1}{2} K_{bo}\} I \end{aligned}$$

BASIC DISTRIBUTION LIST

3/18/66

Joint Services Electronics Program
Report Distribution List**DEPARTMENT OF DEFENSE**

Dr. Edward M. Reilly
Asst. Director (Research)
OFC of Defense Res & Eng
Department of Defense
Washington, D.C. 20301

Office of Deputy Director
(Research and Information Bm 3D1037)
Department of Defense
The Pentagon
Washington, D.C. 20301

Director
Advanced Research Projects Agency
Department of Defense
Washington, D.C. 20301

Director for Materials Sciences
Advanced Research Projects Agency
Department of Defense
Washington, D.C. 20301

Headquarters
Defense Communications Agency (333)
The Pentagon
Washington, D.C. 20305

Defense Documentation Center
Attn: TUSA
Cameron Station, Bldg. 5
Alexandria, Virginia 22314

Director
National Security Agency
Attn: Librarian C-312
Fort George G. Meade, Maryland 20715

Weapons Systems Evaluation Group
Attn: Col. Finis G. Johnson
Department of Defense
Washington, D.C. 20305

National Security Agency
Attn: R4-James Zippel
Office of Research
Fort George G. Meade, Maryland 20715

Central Intelligence Agency
Attn: OCB/DO Publications
Washington, D.C. 20505

DEPARTMENT OF THE AIR FORCE

AFRSEE
Hq. USAF
Room ID-429, The Pentagon
Washington, D.C. 20330

AUL37-9663
Maxwell AFB, Alabama 36112

AFRTE (FTBPP-2)
Technical Library
Edwards AFB, California 93523

Space Systems Division
Air Force Systems Command
Los Angeles Air Force Station
Los Angeles, California 90045

Attn: 88SD

SEDMETR/Lt. Starbuck
AFUPO
Los Angeles, California 90045

Det-5, OAB (LOOAR)
Air Force Unit Post Office
Los Angeles, California 90045

Systems Engineering Group (RTD)
Technical Information Reference Branch
Attn: SEPIR
Directorate of Engineering Standards
& Technical Information
Wright-Patterson AFB, Ohio 45433

ARL (ARLY)
Wright-Patterson AFB, Ohio 45433

AFAL (AVT)
Wright-Patterson AFB, Ohio 45433

AFAL (AVTE/R.D. Larson)
Wright-Patterson AFB, Ohio 45433

Office of Research Analyses
Attn: Technical Library Branch
Holloman AFB, New Mexico 88330

Commanding General
Attn: STEWS-WB-VT
White Sands Missile Range (2)
New Mexico 88002

RADC (EMAL-1)
Offices AFB, New York 13442

Academy Library (DFSLB)
U.S. Air Force Academy
Colorado 80840

FJBL
USAF Academy, Colorado 80840

APOC (PCBPS-12)
Eglin AFB, Florida 32925

AFETR Technical Library
(ITV, MU-138)
Patrick AFB, Florida 32925

AFETR (ETLLC-1)
STINFO Officer (for Library)
Patrick AFB, Florida 32925

AFCL (CRMXL)
AFCL Research Library, Stop 29
L. G. Hancock Field
Bedford, Mass. 01731

ESD (ESTI)
L. G. Hancock Field
Bedford, Mass. 01731 (2)

AEDC (ARO, Inc.)
Attn: Library/Documents
Arnold AFB, Tenn. 37389

European Office of Aerospace Research
Shell Building
47 Rue Cantelstein
Brussels, Belgium (2)

Lt. Col. E. P. Gaines, Jr.
Chief, Electronics Division
Directorate of Engineering Sciences
Air Force Office of Scientific Research
Washington, D.C. 20333

U.S. Army Research Office
Attn: Physical Sciences Division
3945 Columbia Pike
Arlington, Virginia 22204

Research Plans Office
U.S. Army Research Office
3045 Columbia Pike
Arlington, Virginia 22204

Commanding General
U.S. Army Materiel Command
Attn: AMCRD-88-PE-E
Washington, D.C. 20315

Commanding General
U.S. Army Strategic Communications
Command
Washington, D.C. 20315

Commanding Officer
U.S. Army Materials Research Agency
Watertown Arsenal
Watertown, Massachusetts 02172

Commanding Officer
U.S. Army Ballistics Research Laboratory
Attn: V. W. Richards
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Commandant
U.S. Army Air Defense School
Attn: Missile Sciences Division C & S Dept.
P. O. Box 3950
Fort Bliss, Texas 79916

Commanding General
U.S. Army Missile Command
Attn: Technical Library
Redstone Arsenal, Alabama 35809

Commanding General
Frankford Arsenal
Attn: SMUFA-L4005 (Dr. Sidney Ross)
Philadelphia, Pa. 19137

U.S. Army Munitions Command
Attn: Technical Information Branch
Picatinny Arsenal
Dover, New Jersey 07801

Commanding Officer
Harry Diamond Laboratories
Attn: Mr. Barthold Altman
Connecticut Avenue and Van Ness Street N.
Washington, D.C. 20438

Commanding Officer
U.S. Army Security Agency
Arlington Hall
Arlington, Virginia 22212

Commanding Officer
U.S. Army Limited War Laboratory
Attn: Technical Director
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Commanding Officer
Human Engineering Laboratories
Aberdeen Proving Ground, Maryland 21005

Director
U.S. Army Engineer Geodesy,
Intelligence and Mapping
Research and Development Agency
Fort Belvoir, Virginia 22060

Commandant
U.S. Army Command and General
Staff College
Attn: Secretary
Fort Leavenworth, Kansas 66270

Dr. H. Robt. Deputy Chief Scientist
U.S. Army Research Office (Durham)
Box CM, Duke Station
Durham, North Carolina 27706

Commanding Officer
U.S. Army Materiel Command
Attn: AMCRD-88-PE-E
Washington, D.C. 20315

Commanding General
U.S. Army Strategic Communications
Command
Washington, D.C. 20315

Commanding Officer
U.S. Army Materials Research Agency
Watertown Arsenal
Watertown, Massachusetts 02172

Commanding Officer
U.S. Army Ballistics Research Laboratory
Attn: V. W. Richards
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Commandant
U.S. Army Air Defense School
Attn: Missile Sciences Division C & S Dept.
P. O. Box 3950
Fort Bliss, Texas 79916

Commanding General
U.S. Army Missile Command
Attn: Technical Library
Redstone Arsenal, Alabama 35809

Commanding General
Frankford Arsenal
Attn: SMUFA-L4005 (Dr. Sidney Ross)
Philadelphia, Pa. 19137

U.S. Army Munitions Command
Attn: Technical Information Branch
Picatinny Arsenal
Dover, New Jersey 07801

Commanding Officer
Harry Diamond Laboratories
Attn: Mr. Barthold Altman
Connecticut Avenue and Van Ness Street N.
Washington, D.C. 20438

Commanding Officer
U.S. Army Security Agency
Arlington Hall
Arlington, Virginia 22212

Commanding Officer
U.S. Army Limited War Laboratory
Attn: Technical Director
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Commanding Officer
Human Engineering Laboratories
Aberdeen Proving Ground, Maryland 21005

Director
U.S. Army Engineer Geodesy,
Intelligence and Mapping
Research and Development Agency
Fort Belvoir, Virginia 22060

Commandant
U.S. Army Command and General
Staff College
Attn: Secretary
Fort Leavenworth, Kansas 66270

Dr. H. Robt. Deputy Chief Scientist
U.S. Army Research Office (Durham)
Box CM, Duke Station
Durham, North Carolina 27706

Commanding Officer
U.S. Army Materiel Command
Attn: AMCRD-88-PE-E
Washington, D.C. 20315

Commanding General
U.S. Army Strategic Communications
Command
Washington, D.C. 20315

Commanding Officer
U.S. Army Materials Research Agency
Watertown Arsenal
Watertown, Massachusetts 02172

Commanding Officer
U.S. Army Ballistics Research Laboratory
Attn: V. W. Richards
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Commandant
U.S. Army Air Defense School
Attn: Missile Sciences Division C & S Dept.
P. O. Box 3950
Fort Bliss, Texas 79916

Commanding General
U.S. Army Missile Command
Attn: Technical Library
Redstone Arsenal, Alabama 35809

Commanding General
Frankford Arsenal
Attn: SMUFA-L4005 (Dr. Sidney Ross)
Philadelphia, Pa. 19137

U.S. Army Munitions Command
Attn: Technical Information Branch
Picatinny Arsenal
Dover, New Jersey 07801

Commanding Officer
Harry Diamond Laboratories
Attn: Mr. Barthold Altman
Connecticut Avenue and Van Ness Street N.
Washington, D.C. 20438

Commanding Officer
U.S. Army Security Agency
Arlington Hall
Arlington, Virginia 22212

Commanding Officer
U.S. Army Limited War Laboratory
Attn: Technical Director
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Commanding Officer
Human Engineering Laboratories
Aberdeen Proving Ground, Maryland 21005

Director
U.S. Army Engineer Geodesy,
Intelligence and Mapping
Research and Development Agency
Fort Belvoir, Virginia 22060

Commandant
U.S. Army Command and General
Staff College
Attn: Secretary
Fort Leavenworth, Kansas 66270

Dr. H. Robt. Deputy Chief Scientist
U.S. Army Research Office (Durham)
Box CM, Duke Station
Durham, North Carolina 27706

Commanding Officer
U.S. Army Materiel Command
Attn: AMCRD-88-PE-E
Washington, D.C. 20315

Commanding General
U.S. Army Strategic Communications
Command
Washington, D.C. 20315

Commanding Officer
U.S. Army Materials Research Agency
Watertown Arsenal
Watertown, Massachusetts 02172

Commanding Officer
U.S. Army Ballistics Research Laboratory
Attn: V. W. Richards
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Commandant
U.S. Army Air Defense School
Attn: Missile Sciences Division C & S Dept.
P. O. Box 3950
Fort Bliss, Texas 79916

Commanding General
U.S. Army Missile Command
Attn: Technical Library
Redstone Arsenal, Alabama 35809

DEPARTMENT OF THE NAVY

Chief of Naval Research
Department of the Navy
Washington, D.C. 20360 (1)
Attn: Code 427

Chief, Bureau of Ships
Department of the Navy
Washington, D.C. 20360 (4)

Chief, Bureau of Weapons
Department of the Navy
Washington, D.C. 20360 (3)

Commanding Officer
Office of Naval Research Branch Office
207 West 24th Street
New York, New York 10010 (2)

Commanding Officer
Office of Naval Research Branch Office
219 South Dearborn Street
Chicago, Illinois 60604

Commanding Officer
Office of Naval Research Branch Office
1020 East Green Street
Pasadena, California

Commanding Officer
Office of Naval Research Branch Office
207 West 24th Street
New York, New York 10011

Commanding Officer
Office of Naval Research Branch Office
495 Summer Street
Boston, Massachusetts 02210

Director, Naval Research Laboratory
Technical Information Officer
Washington, D.C.
Attn: Code 2000 (8)

Commander
Naval Air Development and
Material Center
Johnsville, Pennsylvania 18974

Librarian
U.S. Naval Electronics Laboratory
San Diego, California 92112 (2)

Commanding Officer and Director
U.S. Naval Underwater Sound Laboratory
Fort Trumbull
New London, Connecticut 06460

Librarian
U.S. Navy Post Graduate School
Monterey, California

Commander
U.S. Naval Air Missile Test Center
Point Mugu, California

Director
U.S. Naval Observatory
Washington, D.C.

Chief of Naval Operations
OP-07
3801 Nebraska Avenue
Washington, D.C. (3)

Director, U.S. Naval Security Group
Attn: G43
3801 Nebraska Avenue
Washington, D.C.

Commanding Officer
Naval Ordnance Laboratory
White Oak, Maryland (2)

Commanding Officer
Naval Ordnance Laboratory
Corona, California

Commanding Officer
Naval Ordnance Test Station
China Lake, California

Commanding Officer
Naval Avionics Facility
Indianapolis, Indiana

Commanding Officer
Naval Training Device Center
Orlando, Florida

U.S. Naval Weapons Laboratory
 Dahlgren, Virginia

Weapons Systems Test Division
Naval Air Test Center
Patuxent River, Maryland
Attn: Library

Other Government Agencies
Mr. Charles F. Yost
Special Assistant to the Director of Research
National Aeronautics and Space Administration
Washington, D.C. 20546

Dr. H. Harrison, Code RRE
Chief, Electrophysics Branch
National Aeronautics and Space Administration
Washington, D.C. 20546

Goddard Space Flight Center
National Aeronautics and Space
Administration
Attn: Library, Documents Section Code 253
Greenbelt, Maryland 20771

NASA Lewis Research Center
Attn: Library
2100 Brookpark Road
Cleveland, Ohio 44135

National Science Foundation
Attn: Dr. John R. Lehmann
Division of Engineering
1800 C Street, N.W.
Washington, D.C. 20550

U.S. Atomic Energy Commission
Division of Technical Information Extension
P. O. Box 62
Oak Ridge, Tenn. 37831

Los Alamos Scientific Laboratory
Attn: Reports Library
P. O. Box 1663
Los Alamos, New Mexico 87544

NASA Scientific & Technical Information
Facility
Attn: Acquisitions Branch (S/AT/DL)
P. O. Box 33
College Park, Maryland 20740 (2)

NON-GOVERNMENT AGENCIES

Director
Research Laboratory of Electronics
Massachusetts Institute of Technology
Cambridge, Mass. 02139

Polytechnic Institute of Brooklyn
15 Johnson Street
Brooklyn, New York 11201
Attn: Mr. Jerome Fom
Research Coordinator

Director
Columbia Radiation Laboratory
Columbia University
538 West 120th Street
New York, New York 10027

Director
Coordinated Science Laboratory
University of Illinois
Urbana, Illinois 61803

Director
Stanford Electronics Laboratories
Stanford University
Stanford, California

Director
Electronics Research Laboratory
University of California
Berkeley 4, California

Director
Electronic Sciences Laboratory
University of Southern California
Los Angeles, California 90007

Professor A. A. Dougal, Director
Laboratories for Electronics
and Related Sciences Research
University of Texas
Austin, Texas 78712

Division of Engineering and Applied Physics
210 Pierce Hall
Harvard University
Cambridge, Massachusetts 02138

Aerospaces Corporation
P. O. Box 9058
Los Angeles, California 90045
Attn: Library Acquisitions Group

Professor Nicholas George
California Inst. of Technology
Pasadena, California

Aeronautics Library
Graduate Aeronautical Laboratories
California Institute of Technology
1201 E. California Blvd
Pasadena, California 91109

Attn: Library
Director, USAF Project RAND
Via: Air Force Liaison Office
The RAND Corporation
1700 Main Street
Santa Monica, California 90406

The Johns Hopkins University
Applied Physics Laboratory
8351 Georgia Avenue
Silver Spring, Maryland
Attn: Boris W. Kuvshinov
Document Librarian

Hent Library
Carnegie Institute of Technology
Schlenker Park
Pittsburgh, Pa. 15213

Dr. Leo Young
Stanford Research Institute
Menlo Park, California

Mr. Henry L. Bachmann
Assistant Chief Engineer
Wheeler Laboratories
125 Cotnam Hill Road
Great Neck, New York

University of Liège
Electronic Department
Mathematics Institute
15, Avenue Des Tilleuls
Val-Benoit, Liège
Belgium

School of Engineering Sciences
Arizona State University
Tempe, Arizona

University of California at Los Angeles
Department of Engineering
Los Angeles, California

California Institute of Technology
Pasadena, California
Attn: Documents Library

University of California
Santa Barbara, California
Attn: Library

Carnegie Institute of Technology
Electrical Engineering Dept.
Pittsburgh, Pa.

University of Michigan
Electrical Engineering Dept.
Ann Arbor, Michigan

New York University
College of Engineering
New York, New York

Syracuse University
Dept. of Electrical Engineering
Syracuse, New York

Yale University
Engineering Department
New Haven, Connecticut

Airborne Instruments Laboratory
Dearpark, New York

Bendix Pacific Division
11400 Sherman Way
North Hollywood, California

General Electric Co.
Research Laboratories
Schenectady, New York

Lockheed Aircraft Corp.
P. O. Box 504
Sunnyvale, California

Raytheon Co.
Bedford, Mass.
Attn: Librarian

Director
Microwave Laboratory
Stanford University
Stanford, California 94305

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) Computation Laboratory Division of Engineering and Applied Physics		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP
3. REPORT TITLE Sequential Coding Schemes for an Additive Noise Channel with a Noisy Feedback Link		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Interim Technical Report		
5. AUTHOR(S) (Last name, first name, initial) Kashyap, R. L.		
6. REPORT DATE May, 1966- August, 1966	7a. TOTAL NO. OF PAGES 32	7b. NO. OF REFS 8
8a. CONTRACT OR GRANT NO. Nonr 1866(16)	9a. ORIGINATOR'S REPORT NUMBER(S) Technical Report No. 508	
b. PROJECT NO. NR - 372 - 012		
c.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		
10. AVAILABILITY/LIMITATION NOTICES Reproduction in whole or in part is permitted by the U. S. Government. Distribution of this document is unlimited.		
11. SUPPLEMENTARY NOTES Research supported in part by Div. of Eng. and Appl. Phys. Harvard U. Cambridge, Mass.	12. SPONSORING MILITARY ACTIVITY Joint Services Electronic Program	
13. ABSTRACT A coding scheme for additive Gaussian channel is developed using a noisy feedback link and D-dimensional elementary signals with no bandwidth constraint. This allows error free transmission at a rate $R < R_c$ where R_c is slightly less than the channel capacity C. When there is no noise in the Feedback channel, the coding scheme reduces to a D-dimensional generalization of the coding scheme of Schalkwijk and Kailath. In addition, the expression for the probability of error is determined when T, the time of Transmission rate is finite. Our scheme is also compared with the best codes which use only the forward channel.		

DD FORM 1473
1 JAN 64

Unclassified

Security Classification

Unclassified

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Gaussian Channel Coding Scheme Feedback Channel Capacity of Channel Information Theory Simplex Codes						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.

DD FORM 1473 (BACK)

1 JAN 64

Unclassified

Security Classification